
Sticks 900 - LED module, double sided



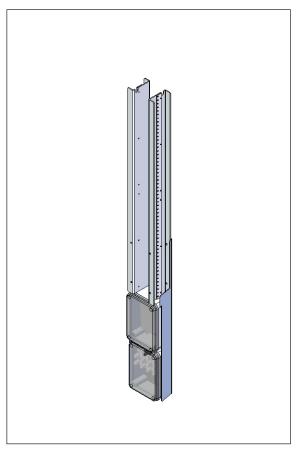

Complete LED module for easy and efficient refurbishment of existing Sticks 900 bollards, double sided.

LED type: Citizen Array CALD0414-M8L1
Energy consumption: 15 or 20 W, 500-700 mA
Operational life: min 50,000 hours at ta max 25°C
Colour temperature: 2700 or 3000 K, energy eff. class E

Colour rendering: min 80 Ra Colour accuracy: 3 Steps SDCM

Driver: LED driver, dimming optional

Operational life: min 50,000 hours

Exchange of light source:

Demount bollard top by loosening two screws at the bottom. Mount the LED module and connect the cables. Remount the bollard top.

We include a blank lable in the consignment. Write the old item number on the lable and attach it inside the luminaire.

Variants:

LED modules for Sticks 900, double sided									
Item No.	Ligh	Light source							
1925-	15 W	15 W Citizen Array, 500 mA							
1926-	20 W	20 W Citizen Array, 700 mA							
	Select colour temperature and other options in the table below.								
Combine with:	Color	Colour temperature		Dimming		Classification			
	827	2700 K, 80 Ra	empty	without dimming	empty	class II			
	830	3000 K, 80 Ra	٧	1-10 V	J	class I			
			D	Dali					
Example:	1926	1926-830 = double-sided LED module for Sticks 900, 20 W, 3000 K 80 Ra, without dimming							
The above LED modules	fit the follo	wing variants	(X stai	nds for colour code	e):				
	7235	7235X, 7245X, 7835X, 7845X,							
	7841,	7841, 7847, 7849, 7850							