


Yoyo - pendant

Design: C.F. Møller Architects

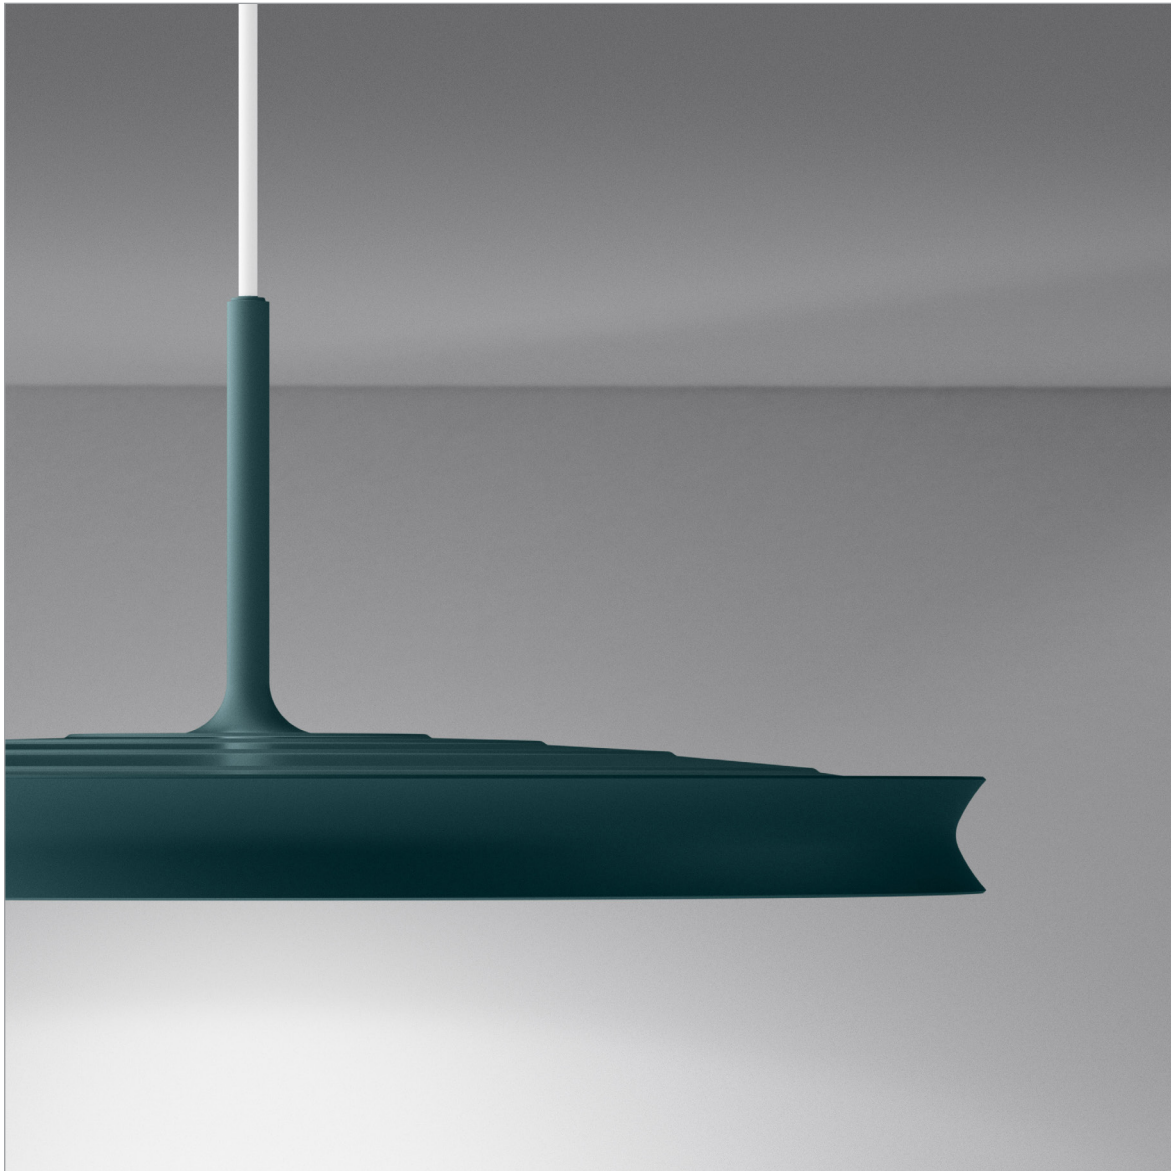

Yoyo is a range of elegant interior light fixtures with low height.

C.F. Møller Architects are the masters of Yoyo's elegant design with distinct curves and slim profiles. Concluded by sharp profiles at both ends, the characteristic parable results in a unique and sculptural look and the impression of a floating luminaire.

Being edge lit the Yoyo fixtures are free from dots and shadows from other components. The light from the edge is guided through the LGP and sent downwards by the top reflector.

Shades for Yoyo are opalised or microprismatic, and the latter is elegant without visible prisms.

Types:

For wall or ceiling, upright optional Pendants

Sizes:

Diameter: 225, 350, or 535 mm
Diameter pendant: 535 or 350 mm

Finish:

Various RAL colours

Lighting:

LED: Edge Lit, exchangeable
Top reflector + light guide plate (LGP)


Yoyo 535 - pendant

Design: C.F. Møller Architects



Luminaire specification:

Material:	Cast aluminium
Colour, G20:	white RAL9010, black RAL9005, alu-grey RAL9006, yellow RAL1032, orange RAL2003, blue-green RAL6004, squirrel grey RAL7000
Shade:	Acrylate (PMMA), opalised or micro prismatic
Lead:	3 m white or black PKAJ
Classification:	IP20, class I
Weight:	4.2 kg
Lamp type:	LED, exchangeable

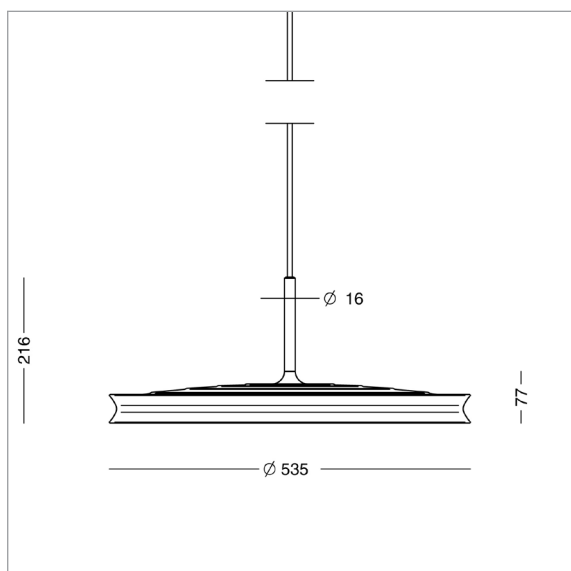

LED and driver specification:

LED:	Edge Lit
Total consumption:	26-36 W
Operational life:	min 50,000 hours at ta 25°C L80B10
Colour temperature:	2700, 3000, or 4000 Kelvin
Energy eff. class:	2700 K: F 3000 and 4000 K: E
Colour rendering:	min 90 Ra
Colour accuracy:	3 Steps SDCM
Driver:	500-700 mA, option for dimmable driver
Operational life:	100,000 hours

Product codes:

YOYO 535 - pendant							
Item No.	Lamp type		Select colour, colour temperature, etc. in the table below.				
1850-	26 W LED, 500 mA						
1851-	36 W LED, 700 mA						
Combine with:	Colour	Shade		Colour temperature		Dimming/Control	
	1 white RAL 9010	empty	PMMA opalised	927	2700 K, 90 Ra	empty	no dimming
	3 black RAL 9005	M	PMMA micro prismatic	930	3000 K, 90 Ra	D	Dali-2
	19 alu-grey RAL 9006			940	4000 K, 90 Ra		
	102 yellow RAL 1032			9WD*	TW, Dali, 90 Ra		
	103 orange RAL 2003			*) longer lead times		Colour of lead	
	104 blue-green RAL 6004					empty	white
	105 squirrel grey RAL 7000					Y	black
Example Item No.:	1851-19M930D = Yoyo 535 pendant, 36 W, alu-grey, prismatic shade, 3000 K 90 Ra, Dali, white lead						


Yoyo 350 - pendant

Design: C.F. Møller Architects



Luminaire specification:

Material:	Cast aluminium
Colour, G20:	white RAL9010, black RAL9005, alu-grey RAL9006, yellow RAL1032, orange RAL2003, blue-green RAL6004, squirrel grey RAL7000
Shade:	Acrylate (PMMA), opalised or micro prismatic
Lead:	3 m white or black PKAJ
Classification:	IP20, class I
Weight:	2.2 kg
Lamp type:	LED, exchangeable

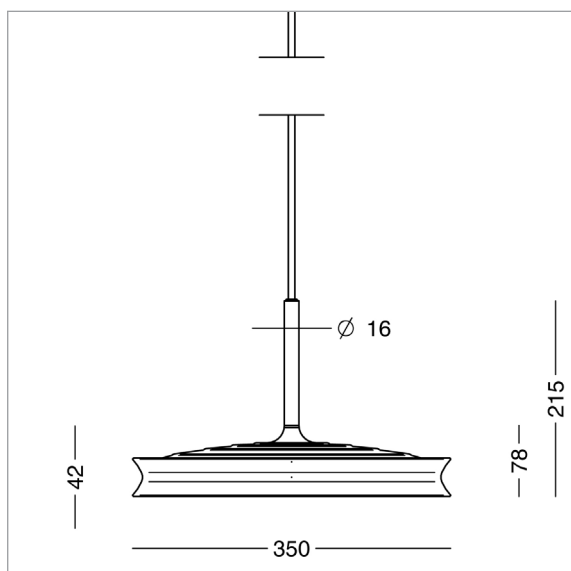

LED and driver specification:

LED:	Edge Lit
Total consumption:	16-23 W
Operational life:	min 50,000 hours at ta 25°C L80B10
Colour temperature:	2700, 3000, or 4000 Kelvin
Energy eff. class:	2700 K: F 3000 and 4000 K: E
Colour rendering:	min 90 Ra
Colour accuracy:	3 Steps SDCM
Driver:	500-700 mA, option for dimmable driver
Operational life:	100,000 hours

Product codes:

YOYO 350 - pendant							
Item No.	Lamp type		Select colour, colour temperature, etc. in the table below.				
1853-	16 W LED, 500 mA						
1854-	23 W LED, 700 mA						
Combine with:	Colour	Shade		Colour temperature		Dimming/Control	
	1 white RAL 9010	empty	PMMA opalised	927	2700 K, 90 Ra	empty	no dimming
	3 black RAL 9005	M	PMMA micro prismatic	930	3000 K, 90 Ra	D	Dali-2
	19 alu-grey RAL 9006			940	4000 K, 90 Ra		
	102 yellow RAL 1032			9WD*	TW, Dali, 90 Ra		
	103 orange RAL 2003			*) longer lead times		Colour of lead	
	104 blue-green RAL 6004					empty	white
	105 squirrel grey RAL 7000					Y	black
Example Item No.:	1853-1M927D = Yoyo 350 pendant, 16 W, white, prismatic shade, 2700 K 90 Ra, Dali, white lead						