
## Sticks 900 - LED module, double sided



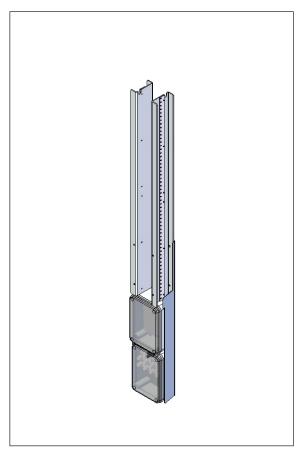

Complete LED module for easy and efficient refurbishment of existing Sticks 900 bollards, double sided.

LED type: Citizen Array CALD0414-M8L1
Energy consumption: 15 or 20 W, 500-700 mA
Operational life: min 50,000 hours at ta max 25°C
Colour temperature: 2700, 3000, or 4000 K, energy eff. class E

Colour rendering: min 80 Ra Colour accuracy: 3 Steps SDCM

Driver: LED driver, dimming optional

Operational life: min 50,000 hours

## Exchange of light source:

Demount bollard top by loosening two screws at the bottom. Mount the LED module and connect the cables. Remount the bollard top.

We include a blank lable in the consignment. Write the old item number on the lable and attach it inside the luminaire.

## Variants:

LED modules for Sticks	900, double	sided								
Item No.	Ligh	Light source								
1925-	15 W	15 W Citizen Array, 500 mA								
1926-	20 W	20 W Citizen Array, 700 mA								
	Select colour temperature and other options in the table below.									
Combine with:	Colour temperature		Dimming		Classification					
	827	2700 K, 80 Ra	empty	without dimming	empty	class II				
	830	3000 K, 80 Ra	٧	1-10 V	J	class I				
	840	4000 K, 80 Ra	D	Dali						
Example:	1926	1926-830 = double-sided LED module for Sticks 900, 20 W, 3000 K 80 Ra, without dimming								
The above LED module	s fit the follo	wing variants	(X staı	nds for colour cod	e):					
		7235X, 7245X, 7835X, 7845X,								
	7841	7841, 7847, 7849, 7850								